


TJ Vibration Isolators




Steel compression springs isolate loads up to 7840 lbs per mount. Moderate spring deflections generally result in usage under medium through high speed equipment such as engine generator sets.

Non-Earthquake Rated

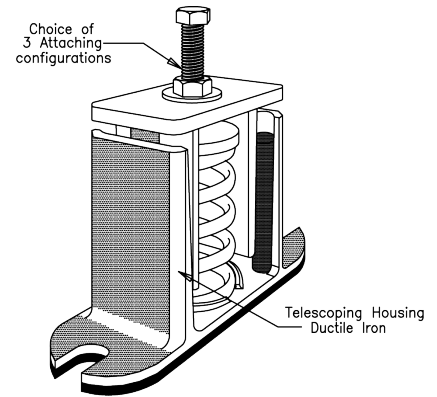

Specifications

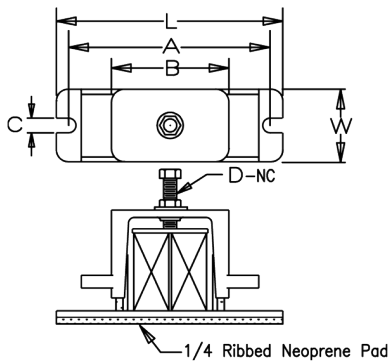

P/N	A	B	C	D	L	W
TJB	5 ³ / ₈	4 ⁷ / ₁₆	9 ¹ / ₁₆	1/2	6 ⁵ / ₈	2
TJC	12	7	5 ⁵ / ₈	5 ⁵ / ₈	13	2 ³ / ₈
TJE	12	7	1 ¹ / ₁₆	5 ⁵ / ₈	13	4 ⁵ / ₈

1 SPRING		
TYPE	Max. LOAD (Lbs.)	Spring Rate (Lbs/in)
TJB	21	18
TJB	55	49
TJB	79	70
TJB	106	94
TJB	120	52
TJB	155	70
TJB	187	165
TJB	244	216
TJB	318	281
TJB	395	220
TJB	511	341
TJB	715	550
*TJB	1060	1060
*TJB	1520	1950
*TJB	1960	2515

2 SPRINGS		
TYPE	Max. LOAD (Lbs.)	Spring Rate (Lbs/in)
TJC	42	36
TJC	110	98
TJC	158	140
TJC	212	188
TJC	240	104
TJC	310	140
TJC	374	330
TJC	488	432
TJC	636	562
TJC	790	440
TJC	1022	682
TJC	1430	1100
*TJC	2120	1120
*TJC	3040	3900
*TJC	3920	5030

4 SPRINGS		
TYPE	Max. LOAD (Lbs.)	Spring Rate (Lbs/in)
TJE	84	72
TJE	220	196
TJE	316	280
TJE	424	376
TJE	480	208
TJE	620	282
TJE	748	662
TJE	976	864
TJE	1272	1124
TJE	1580	880
TJE	2044	1364
TJE	2860	2200
*TJE	4240	4240
*TJE	6080	7800
*TJE	7840	10060